


SPECIFICATIONS FOR THERMO CONTEMPORARY BUILD-IN FIREPLACES

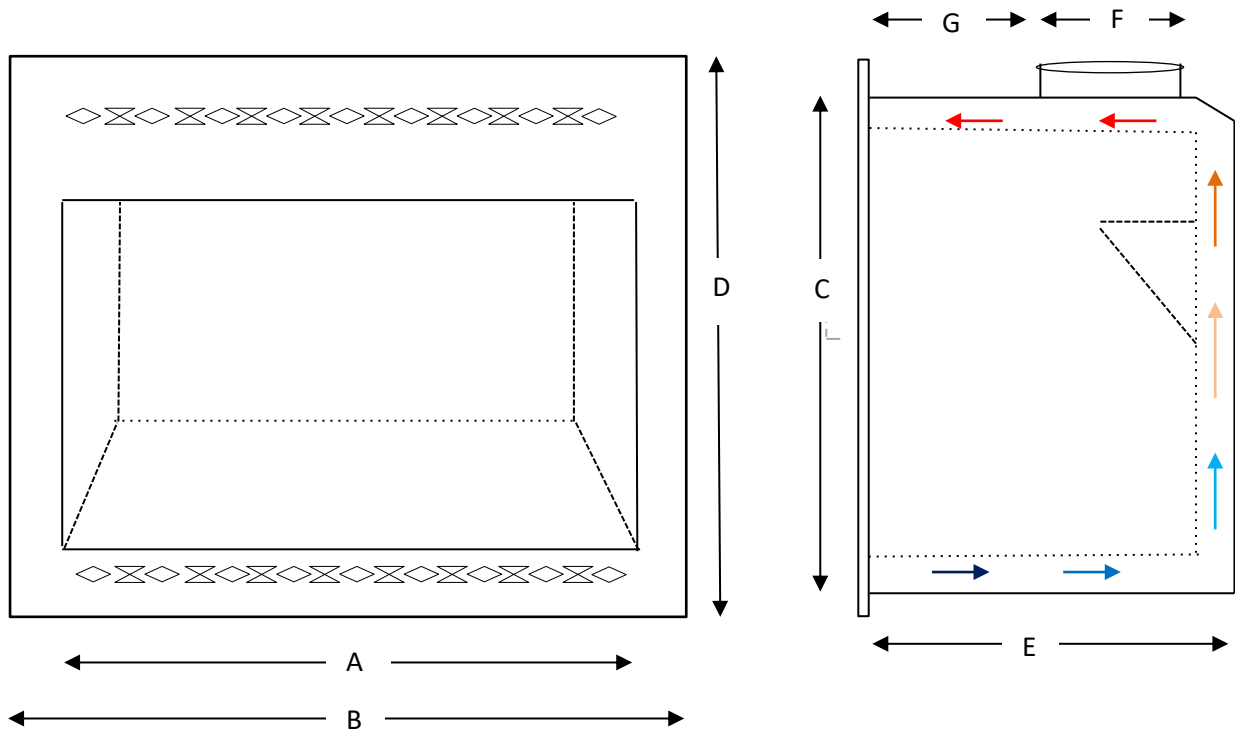

PRODUCT	A=FP width	B=Facade	C=FP height	D=facade	E=FP depth	F=Flue	G=Lintel
MEASUREMENTS GIVEN IN MILLIMETRE							
500	500	640	540	612	450	200 Ø	150
600	600	740	640	712	500	200 Ø	200
700	700	840	640	712	500	230 Ø	170
850	850	990	640	712	500	250 Ø	150
1050	1050	1190	750	822	550	300 Ø	150
1200	1200	1340	750	822	600	350 Ø	150
1500	1500	1640	750	822	650	380 Ø	170

The Façade has laser cut vents for convection - 4 std patterns available - and is standard a return façade, but can also be with a 4mm flat facade